


CUSTOMER WIRING: BELDEN 9731 (P/N 391103) CABLE OR EQUAL
THESE MUST BE RUN IN A
DEDICATED INDIVIDUAL CONDUIT
WITH NO OTHER WIRING.

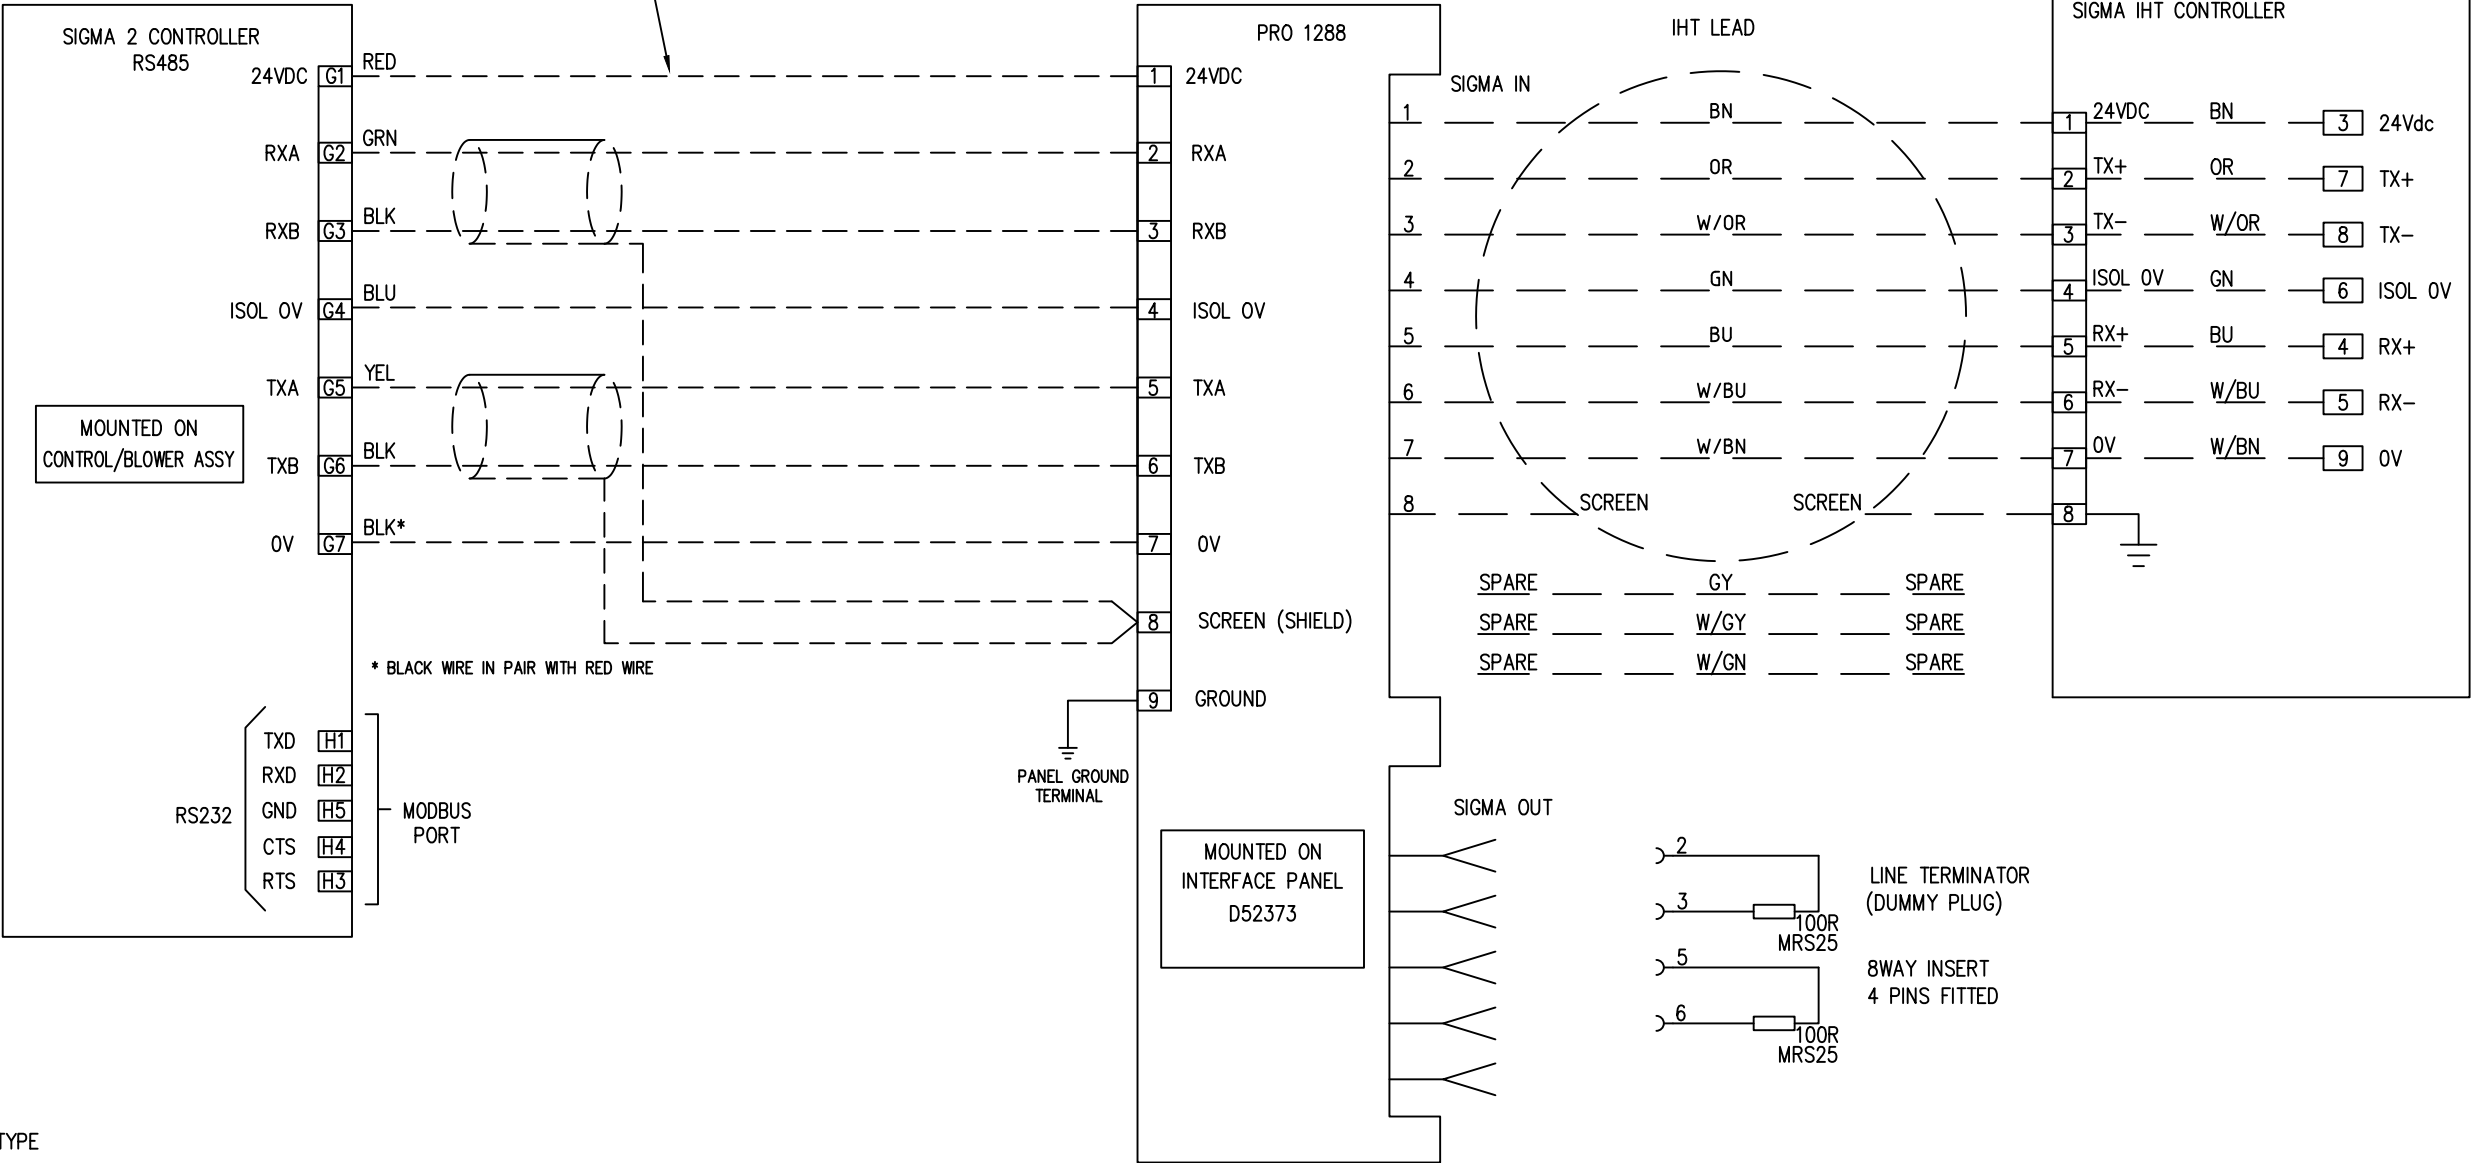


CABLE TYPE

1mm••TRI RATED BS6231
INTERNAL MULTICORE 0.22mm² (30/0.1)
CABLE SPEC. FSM8

TWISTED PAIR	COLOUR CODE/PAIR FOIL SCREEN	CROSS SECTION mm ²
#1	WHITE/BLUE	0.22
#2	WHITE/ORANGE	0.22
#3	WHITE/GREEN	0.22
#4	WHITE/BROWN	0.22
DRAIN		0.22 BRAID

0.5mm••TRI RATED BS6231
EXTERNAL MULTICORE 0.22mm² (7/0.2)
CABLE SPEC. BBC PSF10/2

TWISTED PAIR	COLOUR CODE/PAIR	CROSS SECTION mm ²
#1	BROWN + BROWN/WHITE	0.22
#2	ORANGE + ORANGE/WHITE	0.22
#3	GREEN + GREEN/WHITE	0.22
#4	BLUE + BLUE/WHITE	0.22
#5	GREY + GREY/WHITE	0.22
SCREEN		0.15 BRAID

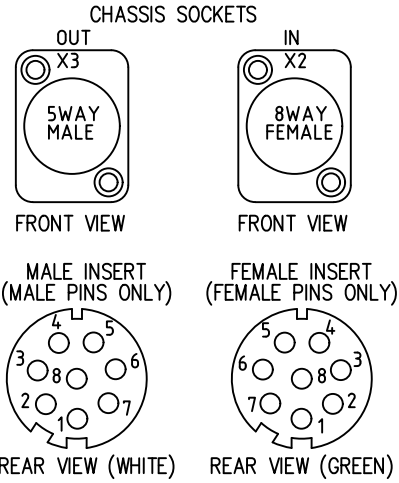

IHT CONNECTOR WIRING DIAGRAM

1601585

Rev 4-14-25